

Material


Nickel plated brass body, UL approved nylon PA66 claw, NBR o-ring, NBR hermetic seal

IP rating

IP68

Temperature

Static state: -40°C to 100°C, short periods up to 120°C
Dynamic state: -20°C to 80°C, short periods up to 100°C

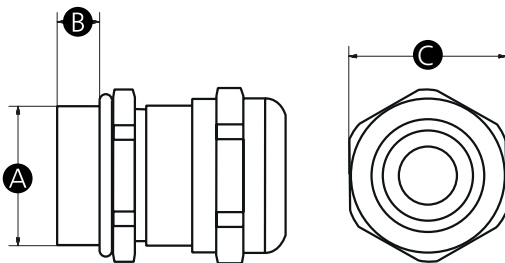

Part No.	A	B	C	Thread size	Cable range
16750Y	12	8	14	M12x1.5	4-7
16751U	16	8.2	18	M16x1.5	5-8
16752Q	20	8.6	22	M20x1.5	6-12
16753X	25	9	30	M25x1.5	7-14
16754T	32	11	40	M32x1.5	16-22
16755P	40	12	50	M40x1.5	22-32
16756W	50	10	58	M50x1.5	30-38
16757S	63	17	68/44	M63x1.5	34-44
16758Z	12.5	8	14	PG7	4-7
16759V	15.2	8.2	18	PG9	5-8
16760R	18.6	8.6	20	PG11	6-10
16761Y	20.4	9	22	PG13.5	6-12
16762U	22.5	9	24	PG16	7-14
16763Q	28.3	9	30	PG21	13-18
16764X	37	10	40	PG29	14-24
16765T	47	11	50	PG36	25-32