

**Material**

UL approved nylon claw, UL94-V2. NBR o-ring, NBR hermetic seal


**IP rating**

IP68

**Temperature**

Static state: -40°C to 100°C, short periods up to 120°C

Dynamic state: -20°C to 80°C, short periods up to 100°C

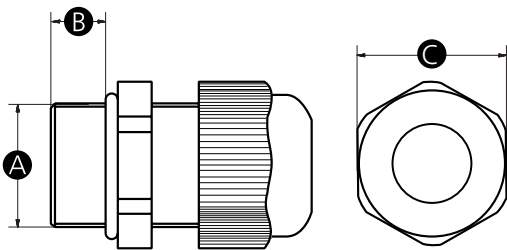

Part No.	A	B	C	Thread size	Cable range	Colour
16781V	12	9	15.9	M12*1.5	4-6.5	Black (RAL 9005)
16782R	16	9	18.6	M16*1.5	4.5-8.5	Black (RAL 9005)
16783Y	20	10	23.5	M20*1.5	6-11	Black (RAL 9005)
16784U	25	12	33	M25*1.5	10-16	Black (RAL 9005)
16785Q	32	12	36	M32*1.5	16-21	Black (RAL 9005)
16786X	40	15	45.8	M40*1.5	20-27	Black (RAL 9005)
16793R	12.5	9	15.9	PG7	4-6.5	Black (RAL 9005)
16794Y	15.2	9	18.6	PG9	4.5-8.5	Black (RAL 9005)
16795U	18.6	9	21.6	PG11	5-10	Black (RAL 9005)
16796Q	20.4	10	23.5	PG13.5	6-11	Black (RAL 9005)
16797X	22.5	10	26.7	PG16	8-13	Black (RAL 9005)
16798T	28.3	12	32.8	PG21	13-18	Black (RAL 9005)
16799P	37	12	41.7	PG29	18-25	Black (RAL 9005)
16787T	12	9	15.9	M12*1.5	4-6.5	Grey (RAL 7001)
16788P	16	9	18.6	M16*1.5	4.5-8.5	Grey (RAL 7001)

Continued on facing page »

« Continued from facing page

Part No.	A	B	C	Thread size	Cable range	Colour
16789W	20	10	23.5	M20*1.5	6-11	Grey (RAL 7001)
16790S	25	12	33	M25*1.5	10-16	Grey (RAL 7001)
16791Z	32	12	36	M32*1.5	16-21	Grey (RAL 7001)
16792V	40	15	45.8	M40*1.5	20-27	Grey (RAL 7001)
16800W	12.5	9	15.9	PG7	4-6.5	Grey (RAL 7001)
16801S	15.2	9	18.6	PG9	4.5-8.5	Grey (RAL 7001)
16802Z	18.6	9	21.6	PG11	5-10	Grey (RAL 7001)
16803V	20.4	10	23.5	PG13.5	6-11	Grey (RAL 7001)
16804R	22.5	10	26.7	PG16	8-13	Grey (RAL 7001)
16805Y	28.3	12	32.8	PG21	13-18	Grey (RAL 7001)
16806U	37	12	41.7	PG29	18-25	Grey (RAL 7001)
16838Y	12	9	15.9	M12*1.5	4-6.5mm	Light grey (RAL 7035)
16839U	16	9	18.6	M16*1.5	4.5-8.5mm	Light grey (RAL 7035)
16840Q	20	10	23.5	M20*1.5	6-11mm	Light grey (RAL 7035)
16841X	25	12	33	M25*1.5	10-16mm	Light grey (RAL 7035)
16842T	32	12	36	M32*1.5	16-21mm	Light grey (RAL 7035)
16843P	40	15	45.8	M40*1.5	20-27mm	Light grey (RAL 7035)
16844W	12.5	9	15.9	PG7	4-6.5mm	Light grey (RAL 7035)
16845S	15.2	9	18.6	PG9	4.5-8.5mm	Light grey (RAL 7035)
16846Z	18.6	9	21.6	PG11	5-10mm	Light grey (RAL 7035)
16847V	20.4	10	23.5	PG13.5	6-11mm	Light grey (RAL 7035)
16848R	22.5	10	26.7	PG16	8-13mm	Light grey (RAL 7035)
16849Y	28.3	12	32.8	PG21	13-18mm	Light grey (RAL 7035)
16850U	37	12	41.7	PG29	18-25mm	Light grey (RAL 7035)