

**Material**

UL approved nylon claw, UL94-V2. NBR o-ring, NBR hermetic seal


**IP rating**

IP68

**Temperature**

Static state: -40°C to 100°C, short periods up to 120°C

Dynamic state: -20°C to 80°C, short periods up to 100°C

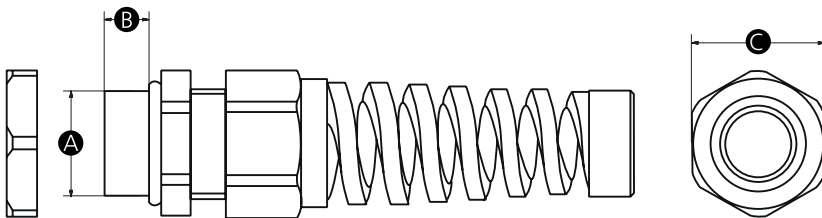

Part No.	A	B	C	Thread size	Cable range	Colour
16807Q	12	9	15.9	M12*1.5	4-6.5	Black (RAL 9005)
16808X	16	15	19	M16*1.5	4.5-8.5	Black (RAL 9005)
16809T	20	15	24	M20*1.5	6-11	Black (RAL 9005)
16810P	25	15	33	M25*1.5	13-18	Black (RAL 9005)
16811W	12	9	15.9	M12*1.5	4-6.5	Grey (RAL 7001)
16812S	16	15	19	M16*1.5	4.5-8.5	Grey (RAL 7001)
16813Z	20	15	24	M20*1.5	6-11	Grey (RAL 7001)
16814V	25	15	33	M25*1.5	13-18	Grey (RAL 7001)
16851Q	12	9	15.9	M12*1.5	4-6.5	Light grey (RAL 7035)
16852X	16	15	19	M16*1.5	4.5-8.5	Light grey (RAL 7035)
16853T	20	15	24	M20*1.5	6-11	Light grey (RAL 7035)
16854P	25	15	33	M25*1.5	13-18	Light grey (RAL 7035)
16815R	12.5	9	15.9	PG7	4-6.5	Black (RAL 9005)
16816Y	15.2	9	19	PG9	4.5-8.5	Black (RAL 9005)
16817U	18.6	9	22.8	PG11	5-10	Black (RAL 9005)

Continued on facing page »

« Continued from facing page

Part No.	A	B	C	Thread size	Cable range	Colour
16818Q	20.4	10	24	PG13.5	6-11	Black (RAL 9005)
16819X	22.5	10	27.2	PG16	8-13	Black (RAL 9005)
16820T	28.3	12	33	PG21	13-18	Black (RAL 9005)
16821P	12.5	9	15.9	PG7	4-6.5	Grey (RAL 7001)
16822W	15.2	9	19	PG9	4.5-8.5	Grey (RAL 7001)
16823S	18.6	9	22.8	PG11	5-10	Grey (RAL 7001)
16824Z	20.4	10	24	PG13.5	6-11	Grey (RAL 7001)
16825V	22.5	10	27.2	PG16	8-13	Grey (RAL 7001)
16826R	28.3	12	33	PG21	13-18	Grey (RAL 7001)
16855W	12.5	9	15.9	PG7	4-6.5	Light grey (RAL 7035)
16856S	15.2	9	19	PG9	4.5-8.5	Light grey (RAL 7035)
16857Z	18.6	9	22.8	PG11	5-10	Light grey (RAL 7035)
16858V	20.4	10	24	PG13.5	6-11	Light grey (RAL 7035)
16859R	22.5	10	27.2	PG16	8-13	Light grey (RAL 7035)
16860Y	28.3	12	33	PG21	13-18	Light grey (RAL 7035)