



Material


High impact resistant thermoplastic

Finish

Matt

Colour

Black

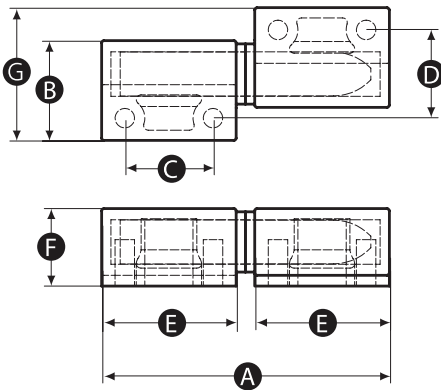

Part No.	A	B	C	D	E	F	G	Thread size	Min. thread depth	Chirality
15746V	62	22	19	19	29	17	29	M5	10	Left Handed
15748Y	62	22	19	19	29	17	29	M5	10	Right Handed
15747R	83	28	25.5	25.5	38	22	38	M6	10	Left Handed
15749U	83	28	25.5	25.5	38	22	38	M6	10	Right Handed


Part No.	Radial load (N)	Axial load (N)	Recommended tightening torque (Nm)	Approx. shear force per screw (kN)
15746V	170	490	1.5	0.28
15748Y	170	490	1.5	0.28
15747R	220	640	2.5	0.5
15749U	220	640	2.5	0.5

Continued on facing page »


« Continued from facing page

Mounting options

A Install hinges with matching vertical orientation to enable quick, easy and safe removal of doors without the use of tools.




B Install hinges with opposing vertical orientation to enable doors to be permanently mounted.



Chirality

Left-Handed

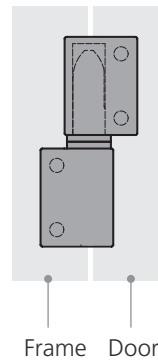

Right-Handed

